

Timber Flush Casement Triple Glazed side-guided Window

Livingwood triple glazed is available as a side-guided window & a top-swing window; it features a triple-pane unit and 90° side hinges (G2449) by the British company Yale; these allow us to manufacture tall outward-opening/out-swing windows. The 90° side-hung window can be easily opened for safe and convenient window-cleaning.


In a closed position, the hinges of the window frame are hidden in the slots in the window structure between the frame and the jamb – as a result, these windows are a popular choice both for apartment buildings in a more modern style and also for the older style houses.

Technical specification of the window:

- Cross sections: jamb 55 x 92 mm; frame 65 x 75 mm
- Laminated pine A1-A3;
- Maximum area of the movable frame: 1.2 m²;
- Maximum permitted mass for the frame: 35 kg;
- Insulated glass unit: Three panes, the maximum U-value of the glass unit is 0.7 W/m²K (in an opening without the frame, the maximum U-value of the sealed unit is 0.6W/m²K);
- The overall performance of the window achieves U-values better than 1.0.

Warranty

All products come with a five year warranty.

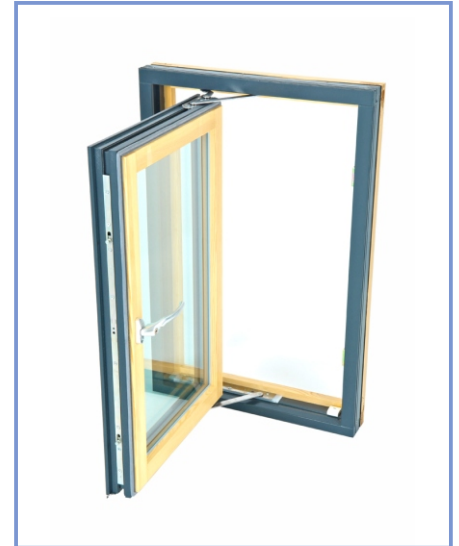

About Livingwood Windows

Our manufacturer started in 1968 as a small joinery workshop specializing in the manufacture of windows and doors. Now an established company they are renowned for their quality and customer service. The factory is currently 3500 sqm. and has the latest machinery installed. The factory is staffed with experienced carpenters who are highly motivated and skilled. They are our biggest asset enabling us to combine good old fashion craftsmanship with the speed of modern technology.

Livingwood Windows Ltd was started by building specialists with over 25 years experience supplying the UK. Livingwood Windows has been established to satisfy a growing demand for high quality window and door systems to suit all budgets. We can supply varying styles of windows and doors, from traditional to contemporary covering all building styles and customer requirements. All our products can be supplied in either slow growing pine from Northern Europe, Meranti and Oak. The final product delivered to site is factory finished; all that is required is the installation.

Timber Flush Casement Triple Glazed top-swing Window

The top-swing version of the 3K window features a triple-pane unit and swing hinges (G2475) by the renowned British lock company Yale – as a result, the maximum permitted load for the hinges is a remarkable 80 kilograms; this allows us to manufacture windows which have a wide pane area and can also be opened. Additionally, it has a safe opening guard so that the window can be opened step by step – the guard plays an especially important role in guaranteeing the safety of children.

Attractive

In a closed position, the hinges of the top-swing frame are cleverly hidden in the slots in the window structure between the frame and the jamb – as a result, these windows are also suitable for houses in a more modern style.

User Friendly

The window opens and closes smoothly and easily, whatever the size. The maximum load permitted for the window allows us to install triple-pane sealed units in the frame; these sealed units guarantee excellent thermal resistance and acoustic insulation.

Convenient

The window can be closed in a night-ventilation position which leaves a minimum gap between the frame and the jamb for the ventilation of the rooms. The window can be fitted with the Trimvent 90 ventilation flap which is approved and popular in the UK and guarantees the constant inflow of fresh air, even when the window is closed. The frame of the window can be completely rotated for safe and convenient window-cleaning, and the curtains, the roller blinds and the objects on the windowsill will not be in the way when the window is opened.

Technical specification of the window:

- Jamb 55 x 92 mm; frame 65 x 75 mm – laminated pine A1-A3;
- Maximum area of the movable frame: 2.25 square metres;
- Maximum allowed mass for the frame: 80 kg;
- Insulated glass unit: Three panes, the maximum U-value of the glass unit is 0.7 W/m²K (in an opening without the frame, the maximum U-value of the sealed unit is 0.6W/m²K);
- The overall performance of the window achieves U-values better than 1.0.



Livingwood Windows Limited

Studio 5,
Old School Studios,
140 Eastgate Street
Bury St Edmunds,
Suffolk,
IP33 1XX

tel: 01284 705468
email: sales@livingwoodwindows.co.uk



SW-COC-1001
FSC Trademark Copyright 1996
Forest Stewardship Council A.C